



higher education  
& training

Department:  
Higher Education and Training  
REPUBLIC OF SOUTH AFRICA



**BUFFALO CITY**  
**TVET COLLEGE**

**REQUEST FOR QUOTATION: SUPPLY AND INSTALLATION OF 2**  
**PREFABRICATED CLASSROOMS**

Kindly see the attached request for quote (RFQ). Quotations should be forwarded to [weziwe@bccollege.co.za](mailto:weziwe@bccollege.co.za); cc: [zimkhitha@bccollege.co.za](mailto:zimkhitha@bccollege.co.za)

Kindly submit the following **COMPULSORY** documents when responding to the RFQ

- Signed quotation (quotations not signed will be eliminated)
- Declaration forms (SBD 4, 8 and 9)
- Certified BEE certificate (0 points will be awarded for BEE certificates that are not certified)
- Tax Clearance Certificate
- CSD report
- Bank Confirmation Letter (not older than 3 months)

**Closing Date: 19 November 2021 at 11h00am. No late or hand delivered documents will be accepted. ONLY EMAILED DOCUMENTS WILL BE ACCEPTED**

Enquiries: Ms Weziwe Gwabavu / Zimkhitha Jikwana

043 704 9241

---



St Marks Campus  
23 St Marks Road, Southernwood,  
Tel: 043 734 6554  
Email: stmadmin@bccollege.co.za

**REQUEST FOR QUOTATION FOR THE SUPPLY AND INSTALLATION of 2 prefabricated classrooms AT BC TVET COLLEGE ST MARKS CAMPUS.**

BC TVET College St Marks campus requests your quotation on the goods and/or services listed hereunder. Please furnish all information as requested and return your quotation on the date stipulated. Late and incomplete submissions will invalidate the quotation submitted.

RFQ NO	
RFQ ISSUE DATE:	
CLOSING DATE AND TIME:	
RFQ VALIDITY PERIOD:	30 days (commencing from RFQ closing date)
RESPONSES TO THIS RFQ SHOULD BE FORWARDED TO:	Email add: <a href="mailto:amdialo@bccollege.co.za">amdialo@bccollege.co.za</a> Or hand deliver to the campus address
ENQUIRES:	Ms Mdlalo / Mr Zihlwele 043 743 6554

This RFQ will be evaluated on the 80:20 point systems as stipulated in the Preferential Procurement Policy Framework Act (Act number 5 of 2000) & BC TVET College's Supply Chain Management Policies and Procedures.

**CONDITIONS:**

1. All purchases will be made through an official order form. Therefore, no goods must be delivered or services rendered before an official order has been received.
2. I certify that all the required information has been furnished and the relevant forms completed and are herewith submitted as part of the bid.
3. I hereby agree that should I be awarded this RFQ, and fail to deliver or perform on the award; the BCC will have the right to enforce Regulation 13 of the Preferential Procurement Regulations.
4. This RFQ is subject to the provisions made in the General Conditions of Contract, as issued by National treasury, including revisions.
5. I hereby agree that the BC TVET College may restrict me from business if my company does not perform or deliver on appointments received.
6. I hereby agree that the onus is on the supplier not to accept orders or make deliveries that will result in over-spending on the amount awarded on this RFQ. I also accept that I will not be paid by the BC TVET College for any over-expenditure.

SIGNATURE OF BIDDER \_\_\_\_\_

CAPACITY: \_\_\_\_\_

## SCOPE OF WORK

### 1. PURPOSE

The purpose of the Request for Quotations is to appoint a service provider/supplier for the Supply and installation of 2 Prefabricated Classrooms to Buffalo City TVET College -- St Marks Campus.

### 2. SCOPE OF WORK – SPECIFICATION

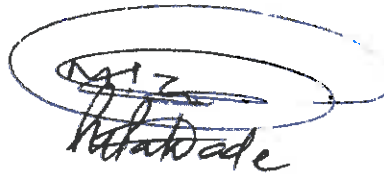
Quantity	2 units
Classroom size	(7X8M) 56M <sup>2</sup>

#### Preliminaries & General

Management of Works, Temporary Services, Legislative Aspects, Financial Aspects, Health & Safety, Structural Certificate and Logistics.

#### Classroom Structure- 7,815mm overall size of the unit.

- Galvanized steel base frame complete with wire mesh vermin barrier
- 40mm EPS Structural insulated wall panels – Flame retardant
- 40mm EPS door panels, complete with ironmongery
- 60mm EPS Structural insulated ceiling panels- flame retardant- I.B.R Externally Steel ridge beam including flashings, trims and barge board.
- 21mm Plywood floorboards, weatherproofed, complete with 2,5mm vinyl tiles and pane skirting.
- 5 x 1,175mm x 1,100mm – Aluminium windows, top-hug complete with laminated safety glass
- 1,500mm undercover overhang to the entrance of the building Rainwater gutters and downpipes to both sides of the unit. Internal electrical Supplied and fitted- SABS verified galvanized entrance step
- 9kg Fire extinguisher complete with brackets and signage.
- 36000 Btu/hr air conditioning unit

  
V. Lewis

V. Lewis 08/11/2021