



higher education
& training
Department:
Higher Education and Training
REPUBLIC OF SOUTH AFRICA



BUFFALO CITY
TVET COLLEGE

REQUEST FOR QUOTATION: GLOCESTER HOUSE PAINTNING

Kindly see the attached request for quote (RFQ). Quotations should be forwarded to weziwe@bccollege.co.za; cc: zimkhitha@bccollege.co.za

Kindly submit the following **REQUIRED** documents when responding to the RFQ

- Signed quotation (quotations not signed will be eliminated)
- Declaration forms (SBD 4, 8 and 9)
- Certified BEE certificate (0 points will be awarded for BEE certificates that are not certified)
- Tax Clearance Certificate
- CSD report
- Bank Confirmation Letter (not older than 3 months)

Closing Date: 14 February 2022 at 11h00 am. No late or hand delivered documents will be accepted. ONLY EMAILED DOCUMENTS WILL BE ACCEPTED

Enquiries: Ms Weziwe Gwabavu / Zimkhitha Jikwana

043 704 9241



**higher education
& training**

Department:
Higher Education and Training
REPUBLIC OF SOUTH AFRICA



**BUFFALO CITY
TVET COLLEGE**

Date: 25 January 2022

Enquiries: Infrastructureac@bccollege.co.za

Maintenance and Repairs at Annex Building (Gloucester House) Painting


Number	Item	Description	Unit	Quantity
1	Painting (Walls)	Prepare the existing wall, apply one undercoat primer paint and apply two coats (premium quality) as per the existing colour scheme.	M2	146
2	Painting (Outside Walls)(Annax Building)	Prepare the existing wall, apply one undercoat primer paint and apply two coats (premium quality) as per the existing colour scheme.	M2	342.40
3	Painting (Garden walls both sides)	Prepare the existing wall, apply one undercoat primer paint and apply two coats (premium quality) as per the existing colour scheme.	M2	435.11
4	Garden	<ul style="list-style-type: none">Demolish the existing 6.6m x 2.5m	M2	16.50

		<p>wall including the foundation.</p> <ul style="list-style-type: none"> • Dig out all roots of the nearby trees and cut off. Ensure a 1 meter vegetation root free space around the foundation and wall area. • Rebuild the foundation and wall as per the diagram below. 6.60m x 2.50m. • Plaster the wall on both sides. 	<p>M2</p> <p>M2</p> <p>M²</p>	<p>16.50</p> <p>33.45</p> <p>66.9</p>
5	Ceiling(Painting)	Prepare the existing ceiling surface, apply one undercoat primer paint and apply two coats (premium quality) white as per the existing colour.	M2	47
6	Painting of walls at Room 1.	Prepare the existing wall, apply one undercoat primer paint and	M2	53

		apply two coats (premium quality) as per the existing colour scheme.		
7	Painting (Ceiling at Room 1)	Prepare the existing wall, apply one undercoat primer paint and apply two coats (premium quality) as per the existing colour scheme.	M2	19
8	Painting(Cornice at Room 1)	Paint cornice with luxurious silk – brilliant light white in colour.	M2	19
9	Skirting	<ul style="list-style-type: none"> • Remove existing skirting replace with new Meranti wood timber. • Apply one coat of wood primer • Apply two coats of premium quality white paint 	M	18
10	Electricity	Fix the minor electrical work and installation New plugs and Light bulbs.	No	18

The quotations are to be submitted to the Infrastructure Unit together with the following documents:

- Valid certified BEE Certificate or sworn affidavit
- Valid Tax Clearance Certificate
- Filled in SBD4, SBD8 & SBD9.

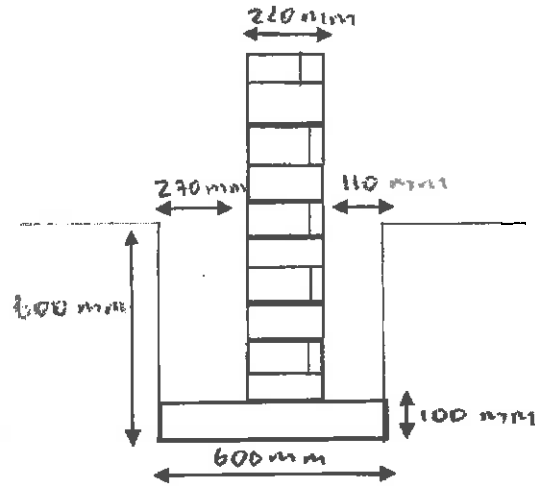

N Ngxekana
AD: Infrastructure Construction and Maintenance

[Handwritten signature]

Z Chola
DP: Corporate Services

[Handwritten signature]

S Siwisa
AD: Procurement

[Handwritten signature]
